



PASIO

25W EMERGENCY BUNKER



PASIO 25W EMERGENCY BUNKER

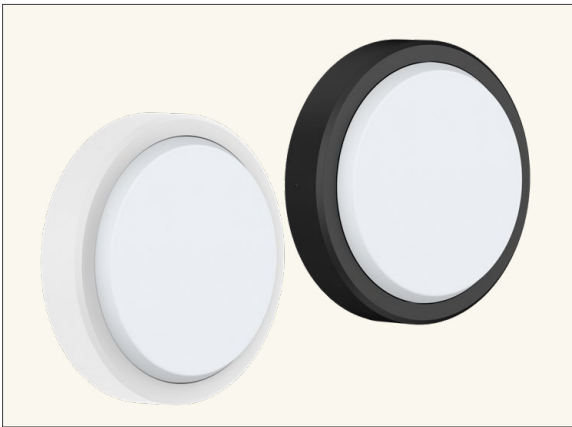

PASIO bunker light is a versatile LED luminaire designed for demanding environments. Featuring high-efficiency SMD LEDs and a high-transmittance diffuser, it delivers consistent, uniform light output. With selectable CCT, adjustable power, and sensor and emergency options, PASIO offers flexible performance with quick, easy installation across a range of applications.

PRODUCT INFO

Model	PASIO
Range	Bunker LED
Mounting Method	Wall / Surface Mount
Battery	LiFeP04
Voltage	200-240VAC, 50Hz

PERFORMANCE SPECIFICATIONS


Power	2-Step Power Select: 20W/25W
Lumens	20W: 2050 - 2350 lm 25W: 2550 - 2950 lm
Beam Angle	120°
IP Rating	IP65
IK Rating	IK10
LEDs	2835SMD CRI80
Dimmable	No
Testing	Auto Test (EM model only)
Emergency Power	3W Max (EM model only)
Photometric Classification	CO D32 C90 D32
Working Temperature	0°C to 45°C

DESIGN SPECIFICATIONS

Weight	1.58kg
Construction	Die-casting
Diffuser Material	PC
Housing Colour	White or Black Housing
Sensor	Microwave Sensor (Optional upgrade)

DIMENSIONS (MM)

Wall / Surface Mount: 63 x Ø300mm

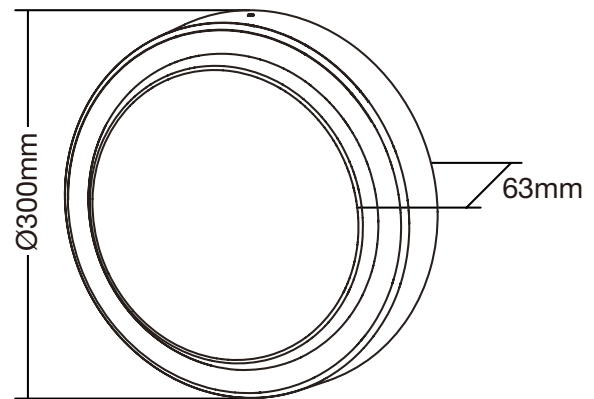

COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS CISPR 15
Warranty	5 Year Warranty

ORDERING EXAMPLE

PASIO	EM	B2	12	25	PS2	WNC	NS	ND	A
MODEL	OPERATION	STANDBY POWER	BODY TYPE	POWER	POWER SELECTION	COLOUR TEMPERATURE	SENSOR	DIMMING	VOLTAGE
PASIO	EM Emergency	B2 Standby battery for EM lighting	12 12" 300mm	25 25W	PS2 2-Step power select	WNC Warm/Neutral/Cool White	NS No Sensor	ND No Dimming	A 220-240VAC, 50Hz
						WWT Warm White	MS Microwave Sensor (Optional upgrade)		
						NWT Neutral White			
						CWT Cool White			